



www.polelifesystems.com

VERTICAL REINFORCEMENT 30"

VR30
(PATENTED)





MOST COMMON POLE TOP REINFORCEMENT FOR ANY WIRE SIZE SMALLER THAN 336 ALSO FOR STREETLIGHT BRACKETS AND SECONDARY POLES

All Primary Poles – With the use of our IS20 and VR30 reinforcement system, your poles are back in compliance and safe again. Our system will save the average utility approximately \$3,500 for most applications versus a complete pole replacement.

Product Details: Material is Solid 1/2" thick high strength composite product, non-conductive, light-weight, fire retardant, corrosion free, low cost and structurally rated to 5,000 lbs.

Hardware not included, compatible to all utility hardware and specifications.

Part Number	Slot/Bolt Width	Dimension (inch)			Approx. Ship Wt. Lbs. Each	Standard Package	ANSI Tested Strength Rating Minimum Ultimate (LBS)			Average Tensile Strength	Average Flexural Strength
		L	D	W			Vertical	Longitudinal	Transverse		
VR30	0.875	30	1/2	5.5	6.75	5 pcs.	5000	1800	1500	84,000 PSI	142,000 PSI

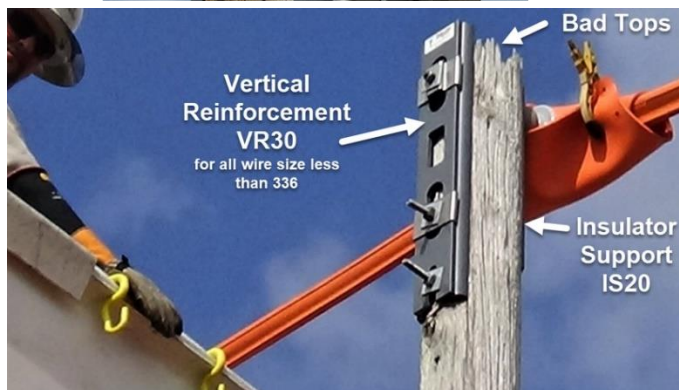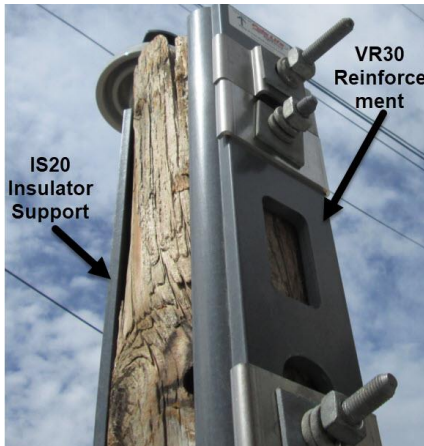

Pole Life Systems, Inc. (727)478-7375